

FEATURES

- Clarity Technology©
- Freestanding, Wall, or Array Deployment
- Cardioid Directivity / Rear-Cancellation
- Compact Build
- High SPL
- IP55 + Salt Water Resistant

APPLICATIONS

- Restaurants
- Lounges
- Houses of Worship
- Theaters
- Entertainment Venues
- Outdoor Systems



DESCRIPTION

Tower LCC84 is a cardioid line array element designed to be compact, high powered and array-able. The enclosure features Clarity Technology©, a proprietary high frequency technology built around eight coaxial transducers each composed of a 4" cone driver and a compression driver. It provides 120° horizontal coverage on axis. Six additional rear 4" full-range transducers allow the unit to provide a cardioid diffusion pattern with -20 dB rear attenuation.

The Towers can be deployed independently or combined using the proprietary Tower Rigging System to create long column arrays. Each LCC84 unit requires two amplifier channels operating with a dedicated DSP preset in order to achieve the cardioid dispersion pattern.

SPECIFICATIONS

Audio Specifications

Description: Cardioid line array column featuring Clarity Technology© high frequency

Bandwidth: 105 Hz - 18 kHz (-6 dB)

Max SPL: 127 dB SPL @ 1 m w/ preset (1 speaker)

Power: 1600 watts front + 800 watts rear (continuous), 800 watts + 400 watts (AES)

Directivity: 120° horizontal, 5° top and bottom

Elements: (8) 4" coaxial each with a 1.4" compression driver, (6) 4" rear-facing full range

Impedance: 8 Ω front speakers, 12 Ω rear speakers

Connectors: (4) NL4, 1+1- front, 2+2- rear, each allowing for audio inputs and linking

Mechanical Specifications

IP Rating: IP55 indoor/outdoor and salt water resistant

Rigging: Proprietary rigging elements and fly bars -3°, 0°, +3°, +6°, +9°; (14) available M6 points

Weight: 43 lbs / 19.5 kg

Construction: Finland birch plywood (phenolic glue), structural stainless steel interior, polyurea, clear matte salt and UV resistant coating, 316 stainless steel hardware, 3D spacer mesh fabric


Dimensions: 36.8" (934 mm) x 6.3" (160 mm) x 9.5" (240 mm)

Colors: Stocking black and white, custom colors and fabrics available


Accessories: LCC44 Wall Bracket, Tower Tube Mount, Tower Rigging System, Fly Bar (Long & Short), Active Speaker Tubes (37.4", 57")

DIRECTIVITY


Horizontal Polar Plot LF

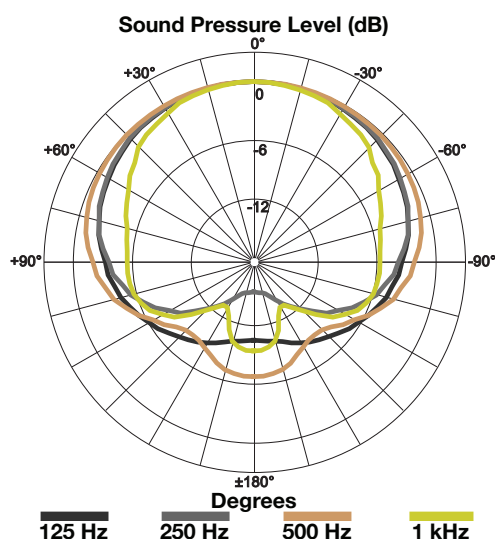


Horizontal Polar Plot HF

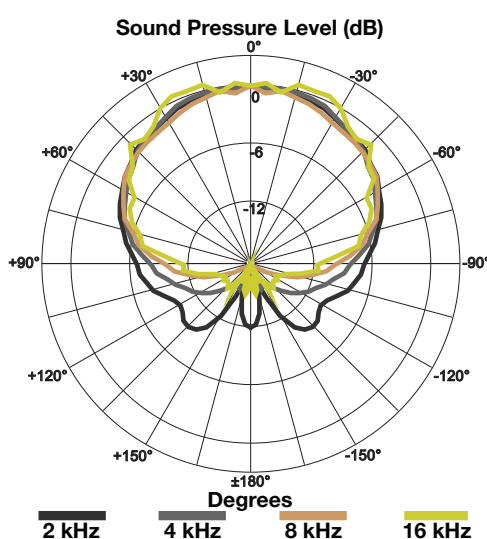


Horizontal





Vertical




FREQUENCY RESPONSE

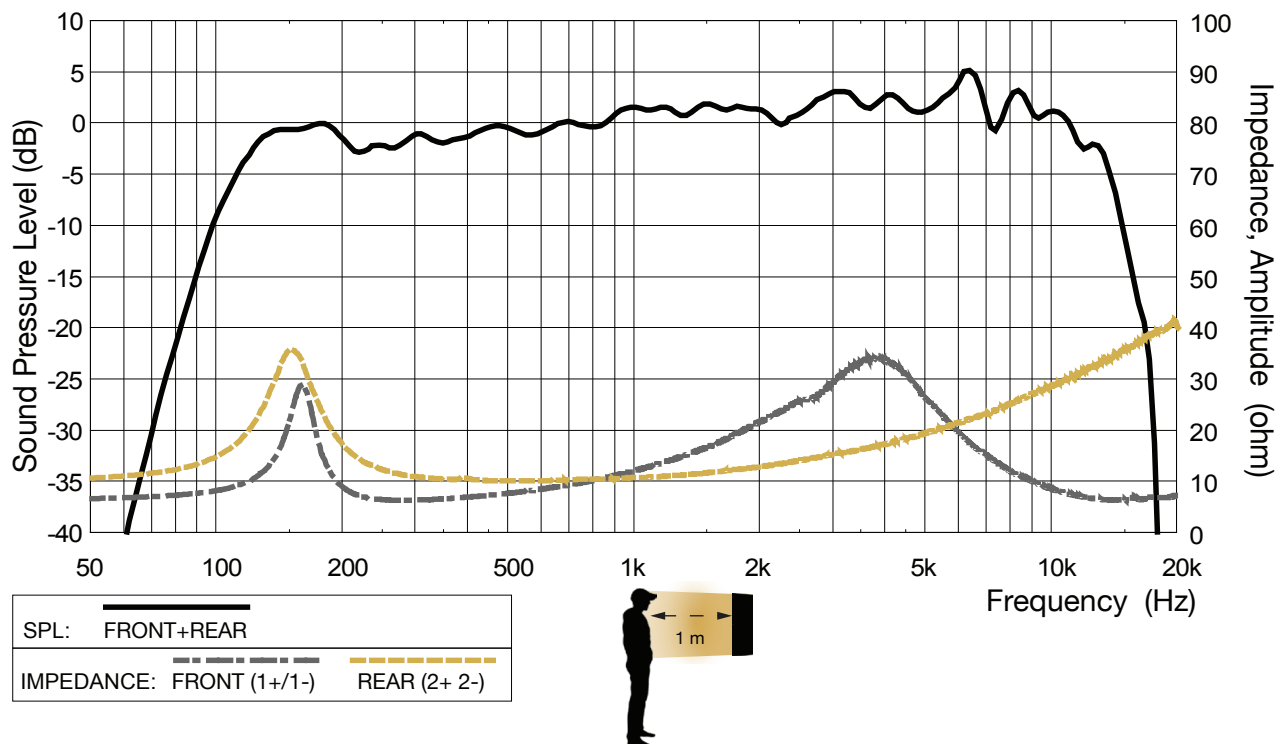

WIRING




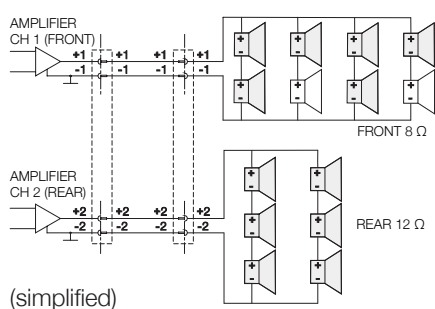


Pinout:
Circuit 1 (front-facing):
1+ Positive
1- Negative
Circuit 2 (rear-facing):
2+ Positive Full Range
2- Negative Full Range

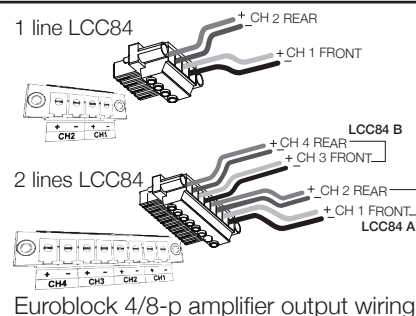

DIMENSIONS

RIGGING

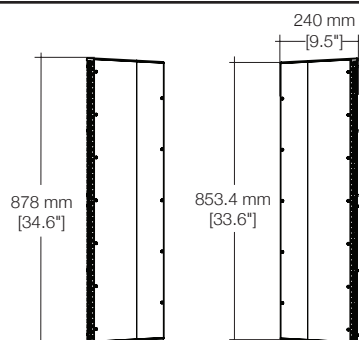

(14) points M6
(2) points M8

- Rear: (2) M8 screws - Tower Wall Bracket
- Top: (6) points - Tower Rigging System
- Bottom: (6) points - Tower Rigging System
- *Bottom (2) points - Tower Tube Mount

ACCESSORIES



LCC84 Wall Bracket




Tower Tube Mount



Active Speaker Tubes



Tower Rigging System



Tower Long or Short Fly Bar

Contact

For more product or service information please contact the 1 SOUND headquarters.

1 SOUND, Manufacturer
USA Distributor
34 Apple Street
Tinton Falls, NJ 07724

tel. +1-732-798-9900
sales@1-sound.com

Warranty

All manufactured 1 SOUND products are warrantied to be free from defects in materials or workmanship for a period of 3 years from original purchase. If there is specific hardware or grilles you might want replaced or any repairs needed please contact your region's authorized 1 SOUND distributor.