

FEATURES

- Four 5" low frequency drivers
- One 10" passive radiator
- Extended bass response down to 39 Hz
- Compact, lightweight and discreet
- IP55 + Salt Water Resistant

APPLICATIONS

- Restaurants
- Lounges
- Residential
- Hospitality
- Gardens



DESCRIPTION

The WSUB45 is an ultra compact, slim and powerful lightweight subwoofer. It is equipped with four 5" low frequency drivers and a single 10" passive radiator. This configuration allows the WSUB45 to provide potent bass reinforcement, with a maximum SPL of 123 dB, while maintaining an extremely compact footprint and very clean look.

The Wall Sub comes with removable rubber feet for floor deployment. The WSUB45 is only 6.6" (168 mm) deep. This unique form factor combines with its 12 rigging points to make it perfect for recessed or surface mounting on walls or ceilings. The Wall Sub can be paired with any of the loudspeakers in the Cannon Series to form a powerful and discreet installed audio system.

SPECIFICATIONS

Audio Specifications

Description:	Passive, compact, narrow-profile installation subwoofer
Bandwidth:	39 Hz - 140 Hz (-6 dB preset dependent)
Max SPL:	123 dB SPL @ 1 m with preset
Power:	900 watts (continuous), 450 watts (AES)
Directivity:	Omnidirectional
Elements:	(4) 5" low frequency drivers, (1) 10" passive radiator
Impedance:	8 Ω
Connectors:	(1) NL4


Mechanical Specifications

IP Rating:	IP55 indoor/outdoor and salt water resistant
Rigging:	(12) points M6
Weight:	25.1 lbs / 11.4 kg
Construction:	Finland birch ply (phenolic glue), clear matte salt and UV resistant coating, 316 stainless steel hardware, 3D spacer mesh fabric
Dimensions:	11.7" (298 mm) x 6.6" (167 mm) x 23.5" (596 mm)
Colors:	Stocking black and white, custom colors and fabrics available
Accessories:	C-Clamps & Bridge Kit for wall and ceiling mounting, Hanging Kit & Ceiling Tile Grille


DIRECTIVITY

Horizontal Polar Plot


Sound Pressure Level (dB)

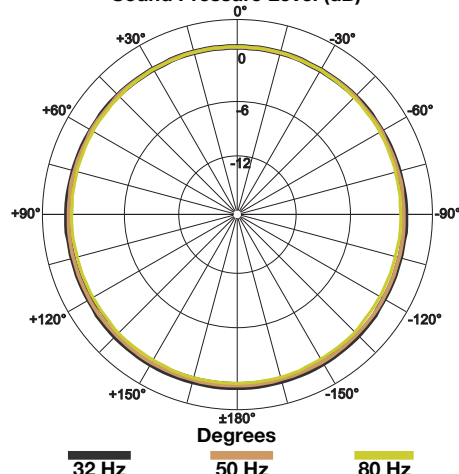


Horizontal Coverage

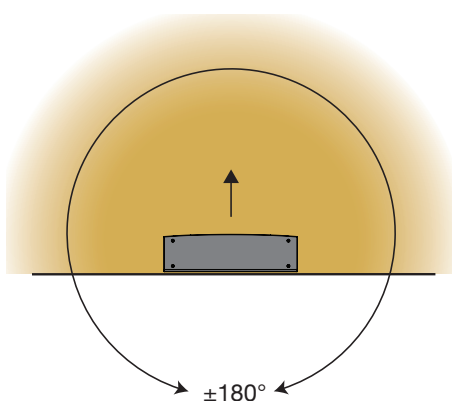


Vertical Coverage

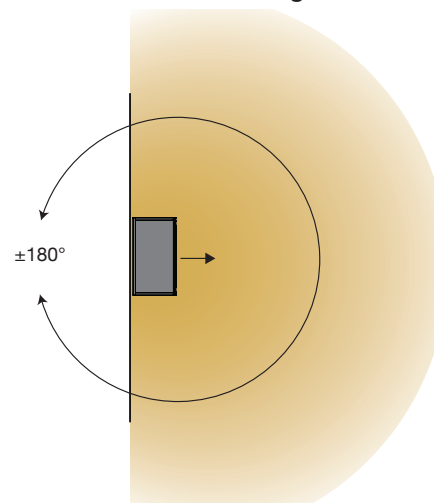

FREQUENCY RESPONSE

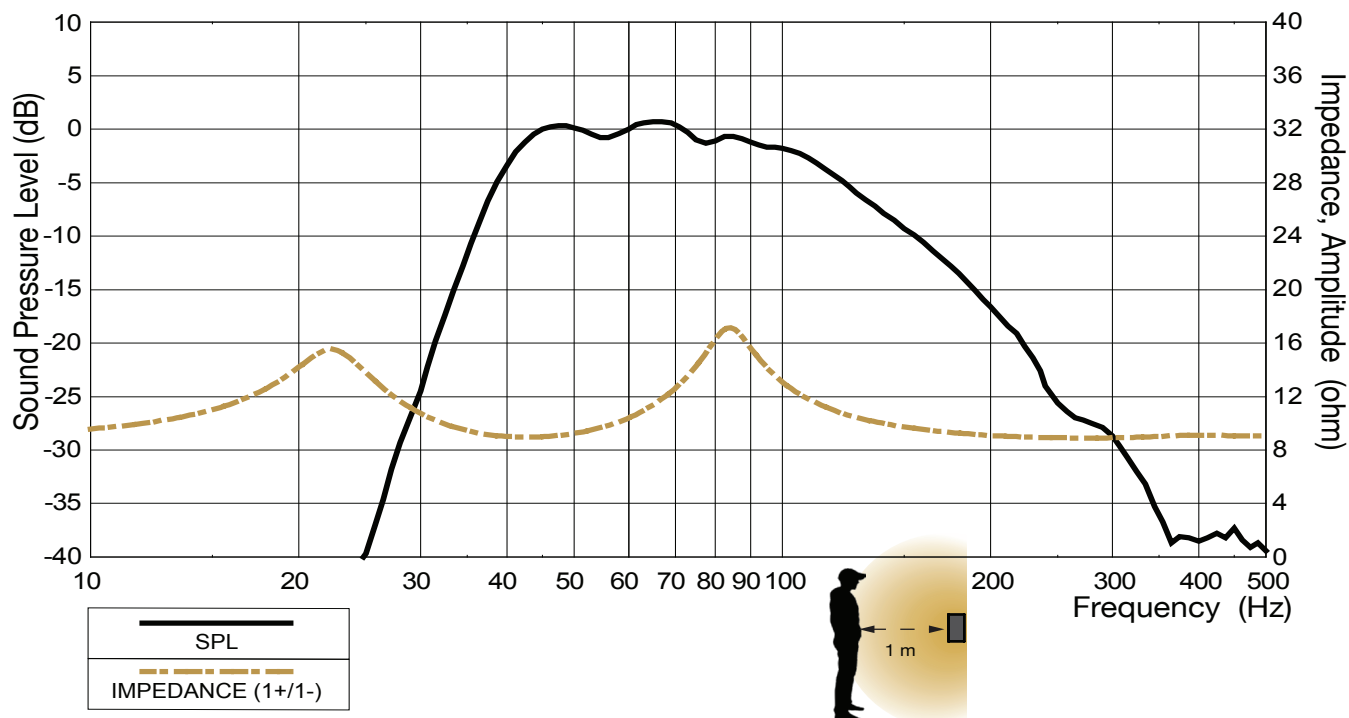


WIRING

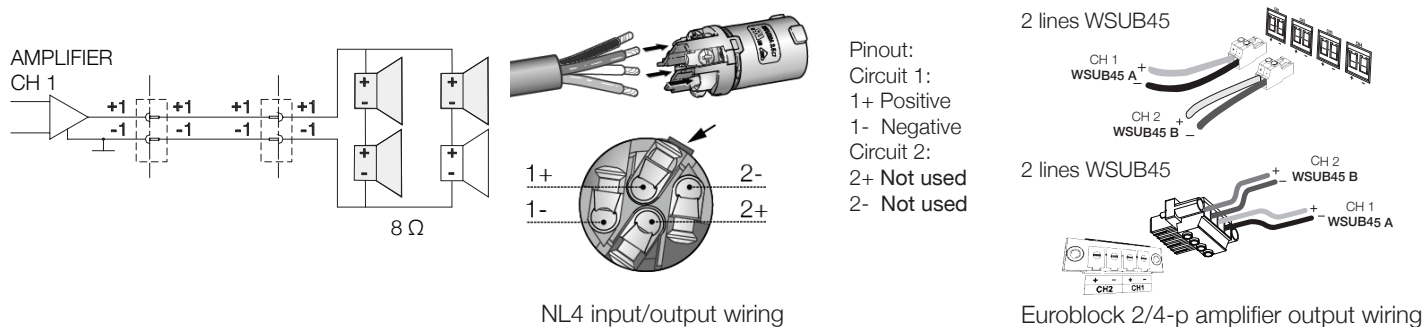


DIMENSIONS

RIGGING

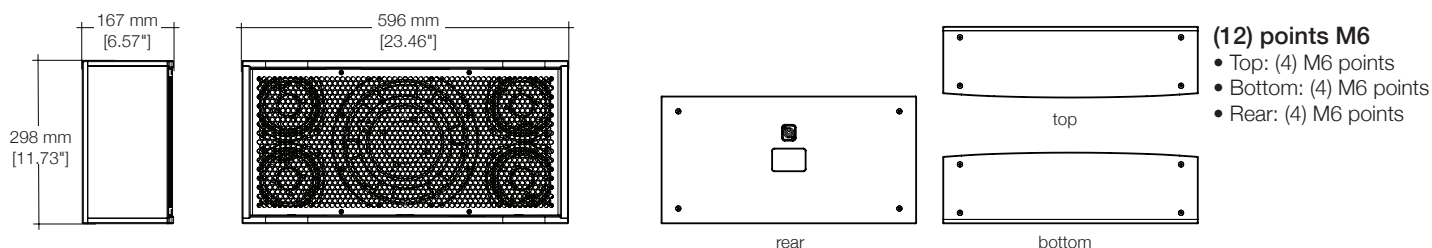

ACCESSORIES

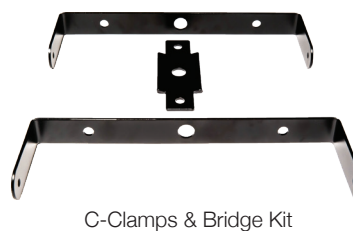

Contact

For more product or service information please contact the 1 SOUND headquarters.

1 SOUND, Manufacturer
USA Distributor
34 Apple Street
Tinton Falls, NJ 07724

tel. +1-732-798-9900
sales@1-sound.com

Warranty

All manufactured 1 SOUND products are warrantied to be free from defects in materials or workmanship for a period of 3 years from original purchase. If there is specific hardware or grilles you might want replaced or any repairs needed please contact your region's authorized 1 SOUND distributor.